


EVENT POWER

[Mk.II]

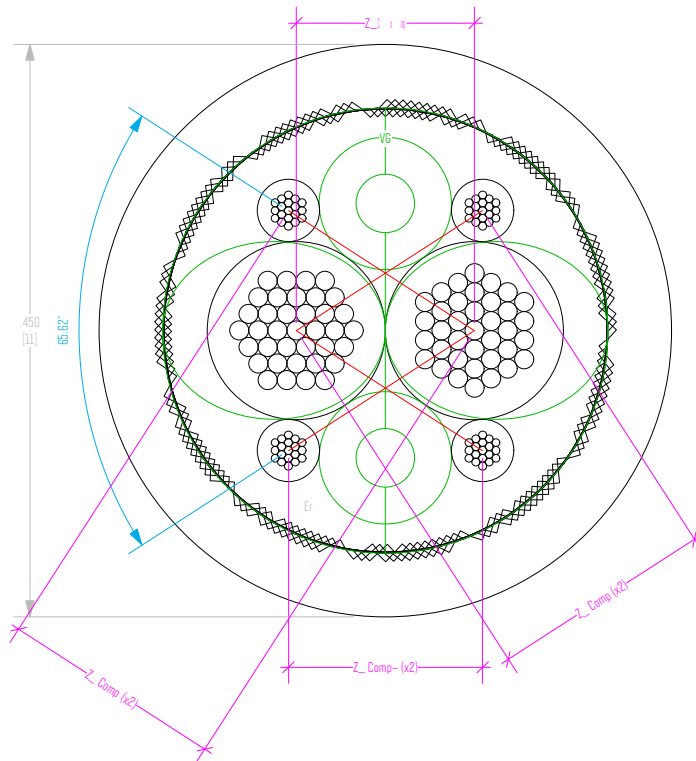

AD COPY + SPECIFICATIONS

11 | 2015



EVENT POWER PHOTOS

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S





EVENT POWER AD COPY

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S

AD COPY

Event Power is our best power cable for equipment needing high current—Event Power for big amps, Event Power *Light* for most everything else.

Zu Event Power is a very high conductance balanced AC mains power cable designed around ZuB3™ E&M models. Event Power will work for all audio power cable needs, high current amplifiers primarily but also DACs, A/Ds, master clocks, phono stages, desktop mixers and consoles, players, preamplifiers, mic preamps, streamers, signal processors and the like. Low power devices however, like all those just mentioned save high current amps, are likely served better by Event Power Light.

Event Power excels in demanding high current amplifier service and it's there where the technology and design of Event Power will be most apparent. In addition to very low resistance Event Power also features very high magnitude/high conductance shield to safeguard your gear, cable, wireless signals and your AC power from being corrupted by electromagnetic interferences—this cable will not radiate nor let electromagnetic interference. And just like its smaller sibling (Event Power Light) Event Power does not contain any filtering devices, just elegant power cable engineering, design, build and termination.

You could spend a lot more on an overgrown, under engineered power cable with a dumb price, but then you wouldn't be able to spend all that cash you saved on a great big pile of new music. Want to know if the Zu Event Power AC mains cable will improve the sound of your system? Our 60-day satisfaction guarantee makes in-home trial dead easy—and we pay return shipping if for any reason you are not completely happy.

In addition to the U.S. spec' wall plug, we also terminate Event Power with country specific connectors like Schuko. If you have any questions about international plug options please e-mail info@ZuAudio.com.

QUICK FEATURES

- Copper/silver conductors on all power circuits.
- ZuB3™ balanced geometry.
- High conductance #9 AWG approximate equivalent on both power legs.
- High conductance #9 AWG approximate equivalent on ground.
- High magnitude RF shielding (DC-1Ghz).
- Cryogenically treated Wattgate™ Evo connectors.
- Solderless/sealed termination.

Uniform E&M fields and their relationship to ground give our ZuB3™ power cables the ability to truly improve the sound of most any electronic component as opposed to lesser engineered power cables.



EVENT POWER AD COPY

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S

QUICK FEATURES

- Copper/silver conductors on all circuits.
- ZuB3™ balanced geometry.
- High conductance #9 AWG equivalent on both power legs.
- High conductance #9 AWG equivalent on ground.
- 100% high magnitude EMI shielding (DC-1Ghz).
- Cryogenically treated Wattgate™ Evo connectors.
- Solderless/sealed termination.

Uniform E&M fields and their relationship to ground give our ZuB3™ power cables the ability to truly improve the sound of most any electronic component as opposed to lesser engineered power cables.

INSTALLATION NOTES

Switch power off prior to disconnecting or connecting cables.

If you touch the exposed contacts with oily or dirty hands you might want to buff them with a clean cotton or microfiber cloth. Keeping the contacts free of contaminants ensures trouble-free connections.

MAINTENANCE

No maintenance is required for the Event Power, cable nor connectors. However, anytime you are making an electrical connection make it a habit to inspect the contacts and clean them if they are tarnished or dirty, Cape Cod™ polish is one of our favorites.


BURN-IN

Event Power mains cable require a good bit of play before complete burn-in is reached, roughly 400 hours—lots of Teflon® equals slow burn-in. We do not recommend any burn-in devices or special recordings. We do recommend music you enjoy, preferably upbeat full spectrum recordings: rock, roots, full orchestra, big band.... For the possible how and whys about burn-in please see our [Answers](#) section.



EVENT POWER SPECIFICATIONS

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S

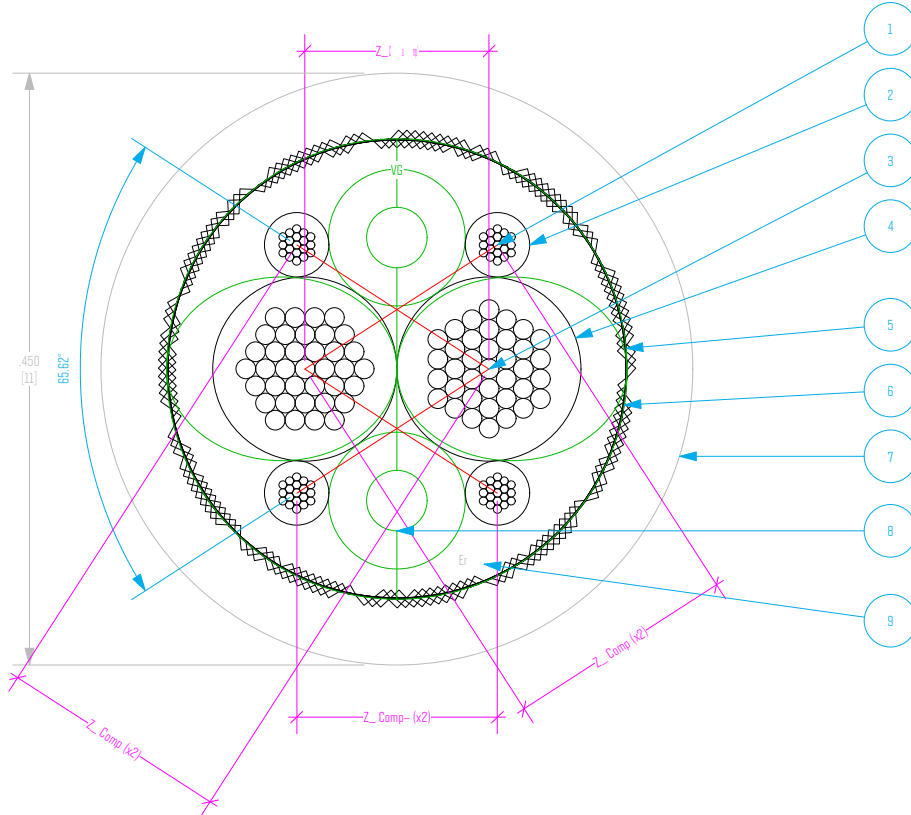

1. Secondary conductors, heavy silver over copper perfect lay [x4 balanced].
2. Teflon® PTFE insulator virgin white [x4 balanced].
3. Primary conductors, heavy silver over copper perfect lay [x2 balanced].
4. Teflon® PTFE insulator virgin white [x2 balanced].
5. 100%+ B&E field containment/dielectric perimeter.
6. High conductance tin/copper ground + shield.
7. Braided fine yarn Dacron sheath.
8. Secondary copper ground node plus Z_0 spacer [x2].



EVENT POWER SPECIFICATIONS

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S

Design Zu Event Power is a very high conductance balanced AC mains power cable designed around ZuB3™ E8M models. Event Power will work for all audio power cable needs, high current amplifiers primarily but also DACs, A/Ds, master clocks, phono stages, desktop mixers and consoles, players, preamplifiers, mic preamps, streamers, signal processors and the like. Low power devices are likely served better by Event Power Light.

Production 2015–current
[preceded by Event Power Mk.I 2010–2015]

Device Under Test Zu Event Power Mk.II [Rev-A] 6.6' [2 m] terminated w/Wattgate Evolution connectors

Designed By Zu Audio

Cable Mfg By Zu Audio

Termination By Zu Audio

Manufacturers Country Of Origin U.S.A. [all cable materials and all labor—Wattgate Evo connectors made in China]

Conductor [high] pure copper & silver / Teflon® insulation

Conductor [low/neutral] pure copper & silver / Teflon® insulation

Ground Current Conductor copper + tin plated copper

Cable Geometry ZuB3™

Wire Geometry primary: perfect lay silver/copper | secondaries: low strand count equal lay silver/copper

Insulator Teflon® (PTFE)

Dielectric Teflon® (PTFE)/air/PVC/Cu

Directional set at factory

Shielding Method geometric + copper/tin tight braid shielding + bi-pole copper core terminated to ground at both ends of cable on ground contacts

Cable Diameter .46" [11.7 mm]

Bend Radius 2-1/2" [64 mm]

Cable Sheath braided fine yarn Dacron

Current/Voltage Rating 15 A/250 V [limited by connector ratings, cable is much greater.]

Conducting Area [high] .01" ~ #9 AWG [6.6 mm²]

Conducting Area [low/neutral] .01" ~ #9 AWG [6.6 mm²]

Conducting Area [ground] .012" ~ #9 AWG [6.63 mm²]

Rs .01 Ω [line]
.01 Ω [neutral]
.01 Ω [ground]

Cp 580 pF [line [high] / neutral [low]]
820 pF [line [high] / ground]
820 pF [neutral [low] / ground]

Ls 6.2 uH [high/line]
6.2 uH [low/neutral]
5.9 uH [ground]

Tolerance 0.1%

Compliance UL, IEEE, CSA, CE, BSI, JET, RoHS

Life Expectancy 100 years+

Warranty & Service limited lifetime, does not cover misuse or abuse



EVENT POWER WARRANTY

ZU AUDIO EVENT POWER Mk.II [REV-A] AC MAINS POWER CABLE AD COPY + SPEC'S

WARRANTY

Zu products are designed and manufactured to the highest quality. However, if something does go wrong Zu will fix or replace the product free of charge. Zu Event Power Light AC mains cables have a limited lifetime warranty applicable to the original owner. If under normal home or studio use you have any problems with this cable we will fix or replace the product.

While every effort is made to ensure a perfect finish that will last a lifetime, this warranty does not cover damage from impact, abrasion or UV exposure. Zu products are designed to be used in temperature and humidity controlled environments, namely your home, studio or office unless otherwise stated.

If in the highly unlikely event that a Zu product arrives to you dead on arrival (D.O.A.), and after discussing it with a Zu tech, we will ship another of the same product at our expense and arrange for the D.O.A. product to be collected. If after inspection we find that you have misrepresented a returned product's condition, and that it was improperly handled or used, Zu will charge you for all damaged parts, labor, shipping and handling of the product.

Warranty does not apply to damage caused by operating the product outside the intended use, accident, damage caused by another product, misuse, abuse, flood, fire, earthquake or any other external causes. Warranty does not cover damage caused by modification or service performed by anyone other than a Zu representative.

When a product or part is exchanged the replacement becomes your property and the suspect or damaged part becomes Zu's property.

WHAT YOU CAN EXPECT IF WARRANTY SERVICE IS NEEDED

If warranty becomes necessary, you must call or e-mail for a return of material authorization (R.M.A.) number. This provides opportunity to assist in diagnosing the problem and helps us to schedule for rapid turnaround in the event that parts, service or repair is needed. Upon factory inspection of parts or product, warranty eligibility will be determined. While service options, parts availability and response times will vary, we do our best to keep you happy. International customers should know that Zu will comply with all applicable export/import laws and regulations, you may be responsible for custom duties, taxes, broker fees, freight, and other charges. When shipping of product or part is required, repackage the complete product, or part, in its original packaging. If you have any questions about packaging please call or e-mail. Product damage caused from incorrect repackaging is not eligible for refund or warranty and the freight company may also reject your insurance claim. Until we have the product back in the shop and sign-off that it is eligible, the product is still your property, we recommend you insure or declare the full value when shipping. We also recommend that you only ship with a freight company that has a good reputation and offers tracking and insurance for the full amount.



ZU AUDIO

Ogden Commercial Industrial Park
3350 S. 1500 W.
OGDEN, UTAH — U.S.A.

[DESIGNED AND MADE BY US]